

Storm Water Management Model Simulation and Evaluation of the Eastern urban drainage system of Cali in the face of climate variability scenarios

INGENIERIA SANITARIA Y DEL AMBIENTE

Evaluación del sistema de drenaje urbano oriental de Cali ante escenarios de variabilidad climática apoyados en la simulación con el Modelo de Gestión de Aguas Pluviales

Camilo Ocampo¹, Yesid Carvajal-Escobar^{1§}, Luis E. Peña²

Universidad del Valle, Faculty of Engineering, School of Natural Resources and the Environment, Cali, Colombia¹

Universidad de Ibagué, Faculty of Engineering, Civil Engineering Program, Ibagué, Colombia²

camilo.ocampo@correounivalle.edu.co, yesid.carvajal@correounivalle.edu.co, luis.pena@unibague.edu.co

(Recibido: 23 de Agosto 2018 – Aceptado: 06 de Mayo de 2019)

Abstract

Occurrence of extreme hydroclimatological events associated with climatic variability and climate change, along with deficient development of urban drainage systems, have increased the occurrence of floods in cities. This study analyzes the hydraulic behavior of the urban drainage system in the east of Cali, during the occurrence of maximum rainfall events, supported by the Storm Water Management Model. Three simulation climate scenarios were developed: (i) current scenario with a return time of 2 and 10 years, (ii) a climate scenario for the year 2030 and (iii) a climate scenario for the year 2040. The model presented an acceptable grade of calibration, with a Nash-Sutcliffe number greater than 0.5 in simulated events, therefore the results obtained appropriately describe the behavior of surface runoff in the study area, in terms of spatial and temporal resolution. In this way, critical points of the drainage system were identified. This information may be potentially useful in the planning of future hydraulic works, leading to an improvement of the hydraulic behavior of the system, and the protection of life and property of the inhabitants of the city.

Keywords: *Climatic variability, Floods, Storm Water Management Model, Urban drainage system, Urban hydrological modeling.*

Resumen

La ocurrencia de eventos hidroclimatológicos extremos asociados a la variabilidad climática y el cambio climático, sumados al desarrollo deficiente de los sistemas de drenaje urbano, ha potenciado la ocurrencia de inundaciones en

las ciudades. En este estudio se analiza el comportamiento hidráulico del sistema de drenaje urbano en el oriente de Cali durante la ocurrencia de eventos de precipitación máxima apoyado en el modelo Storm Water Management Model. Se desarrollaron tres escenarios climáticos de simulación: (i) Escenario actual con un tiempo de retorno de 2 y 10 años, (ii) Escenario climático del año 2030 y (iii) Escenario climático del año 2040. El modelo presentó un grado de calibración aceptable, con un número de Nash-Sutcliffe superior a 0.5 en todos los eventos simulados, de manera que los resultados obtenidos describen apropiadamente el comportamiento de la escorrentía superficial en términos de resolución espacial y temporal. De esta forma se identificaron puntos críticos del sistema de drenaje, potencialmente útiles en los procesos de planeación de obras hidráulicas, que conduzcan al mejoramiento del comportamiento hidráulico del sistema y la protección de la vida y bienes de los habitantes de la ciudad.

Palabras Clave: Inundaciones, Modelación hidrológica urbana, Modelo de Gestión de Aguas Pluviales, Sistema de drenaje urbano, Variabilidad climática.

1. Introduction

Hydroclimatological changes associated with climatic variability and climate change, in addition to soil waterproofing in cities, have promoted the occurrence of urban floods. Colombia is a country where 90% of natural disasters are associated with hydrometeorological phenomena ⁽¹⁾, a situation from which the department of Valle del Cauca, and its capital, the city of Cali, are not exempt.

In Santiago de Cali, 86.8% of natural disasters that occur within the urban perimeter are associated with floods ⁽²⁾. The effects of climate change in Cali are already a reality ^(3,4), being aggravated by the occurrence of the La Niña phenomenon, characterized by an increase in the amount and intensity of rainfall ⁽⁵⁻⁷⁾.

The east of Cali was initially designated for agricultural use, however between the 1960s and the 1990s; it was converted to urban land use, mainly due to the migration of people displaced by the intensification of the national armed conflict ⁽⁸⁾. This accelerated population growth, resulted in erratic planning of the urban management in this area of the city, which failed to allow for an orderly extension of the sewer networks, thereby making its operation, maintenance and operation complex.

In this context, the Storm Water Management Model (SWMM) ^(9,10) has been implemented to describe the response of the urban drainage

system in the eastern sector of Cali, to the occurrence of maximum rainfall. Through hydrological simulation, different climatic scenarios have been evaluated, and in this way, potentially flood-prone points of the city have been identified. This represents a powerful tool for both planning mitigation measures, as well as for adapting to the challenges of climate variability and climate change.

2. Methodology

2.1 The Study Area

The Eastern Drainage Zone (EDZ) is an urban basin of 24.88 km², located in the flat area of the Cauca River's geographical valley, in the east of the city Santiago de Cali, Valle del Cauca, Colombia (Figure 1).

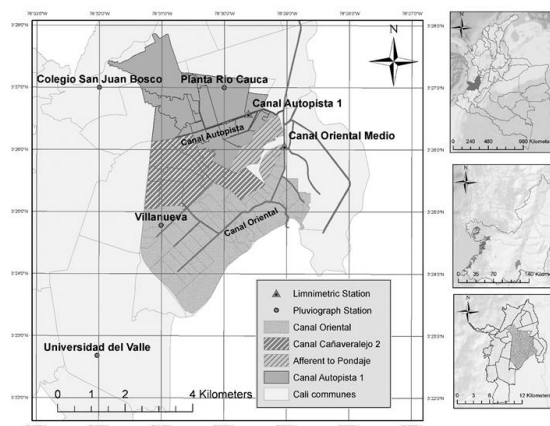


Figure 1. Location of the study area (own source).

The basin has three main channels, the Canal Cañaveralejo 2, Autopista 1 and the Oriental

Medio, of which the last two have a limnometric record. Precipitation is recorded by the 4 stations shown in Figure 1.

90% of the basin is urbanized and waterproofed, and of the 24.88 Km² of the EDZ, 56% corresponds to roofs, sidewalks and parking, 34% to asphalt pavement, and the remaining 10% to green areas. The EDZ is a flat basin, with an average inclination of 0.7%, where according to the Digital Elevation Model of the zone, surface drainage goes in the west-east direction.

The study area has two rainy periods in March-April-May and September-October-November, with April being the rainiest month (141 mm) and July the month with the least rainfall (45 mm), and an average annual rainfall of 1,084 mm, according to the rainfall record of the Planta Río Cauca station and confirmed by the studies (1,4,11). Precipitation events present extreme values influenced by the cold phase of the El Niño Southern Oscillation (ENSO) macro-climatic phenomenon, characterized by a significant increase in the intensity and amount of rain (1, 5-7, 11-14).

The probability distribution function that best adjusts to the maximum daily rainfall is the Log Pearson type III function, and its behavior is described by the Intensity-Duration-Frequency (IDF) curves (15) of the stations: Planta Río Cauca (PRC) (Eq.1), Colegio San Juan Bosco (CSJB) (Eq.2) and Universidad del Valle (UV), (Eq.3).

$$i = \frac{1066.6*Tr^{0.305}}{(t+12.20)^{0.878}} \quad (1)$$

$$i = \frac{6819.4*Tr^{0.138}}{(t+58.8)^{1.113}} \quad (2)$$

$$i = \frac{65700*Tr^{0.055}}{(t+100)^{1.425}} \quad (3)$$

Where:

i: Intensity (mm/h)

Tr: Return time (years)

t: Rainfall duration (minutes)

A program that stands out for its worldwide application and acceptance is the SWMM (16-18). This is a dynamic simulation model which has the capacity to describe events of rainfall runoff and the flow transit in urban basins (10,18). This was the model selected to perform simulations of rainfall-runoff events in the EDZ.

2.2 Model of urban drainage

The collectors, inspection chambers, channels and other existing elements in the basin were schematized in the SWMM model from the cadastre of sewerage networks in Cali, updated by the Empresas Municipales de Cali [Municipal Companies of Cali] (EMCALI) in 2014.

To describe the free flow behavior in the network, we used the Dynamic Wave approximation based on the Saint Venant equations (19), because it does not neglect the inertial and flow pressure terms (20,21), the last term is important in urban basins, given that during the occurrence of maximum rainfall, it is common for networks to work under pressure.

The sub-areas within the basin were defined based on the schematization and flow directions in the sewerage network, furthermore it was possible to detail the characteristics of land use in the study area, particularly the definition of permeable zones for the description of the infiltration processes (17), thereby introducing spatial variability to the model.

To simulate the process of infiltration in the basin, the percentage of permeable area based on Google Earth satellite imagery was defined. For the EDZ, these zones correspond mainly to parks, green zones and those areas which have not as yet been urbanized. To these permeable zones, the infiltration model developed by Horton ⁽²²⁾ was applied. For the values of maximum and minimum infiltration, values were assumed based on the infiltration rates reported in ⁽²³⁾, they were later adjusted as part of the model calibration process.

The calibration period included the events from January 2016 to January 2017; for validation, the records from March 2017 were used. For both processes, there were hourly records of precipitation from the stations: Planta Río Cauca and Villanueva, and level records from the limnigraphic stations: Canal Oriental Medio and Canal Autopista from January 2016 to June 2017.

To evaluate the difference between the observed runoff and that predicted by the model, the Nash-Sutcliffe index efficiency criterion was used ⁽²⁴⁾, which determines the relative magnitude of the residual variance compared to the variance of the measured data, the optimal value is 1.0 and the values must be greater than 0.0 to indicate the "minimum acceptable".

2.3 Design storm used in hydraulic evaluation

Based on the frequency analysis of the daily maximum precipitation data series from the PRC, CSJB and UV stations for the period 1965-2011, the magnitude of the design storms was determined. The behavior of the design storms is that described by the IDF curves (Equations 1, 2

and 3). A rainfall duration time equal to the concentration time of the basin was used, calculated as recommended by the Sewer Design Regulations of the urban area of Cali ⁽²⁵⁾; and 2-year return times were used as a complementary function (free transit of vehicles) ^(26, 27), and a return time of 10 years as a basic function (protection of goods and people) for urban drainage structures ⁽²⁸⁾.

For the hydraulic evaluation of the drainage system in the face of future precipitation scenarios, the maximum daily rainfall series was extended with the support of the software RClimDex, and the Rx1day index was calculated; the maximum amount of rainfall in one day. From these trend analyses, there was an annual increase of daily rainfall with which the design storms were built for 2030 and 2040, this methodology was chosen because of the positive results found in several studies ⁽²⁹⁻³¹⁾. It was not possible to compare these projections of daily maximum rainfall with those made internationally by the Intergovernmental Panel of Experts on Climate Change - IPCC ⁽³²⁾, national projections made by the Instituto de Hidrología, Meteorología y Estudios Ambientales [Institute of Hydrology, Meteorology and Environmental Studies] - IDEAM ⁽³³⁾ or local projections for the city of Cali made by the Corporación Autónoma Regional del Valle del Cauca [Regional Autonomous Corporation] - CVC ⁽³⁴⁾ for the annual scale of the projections made in these studies.

2.4 Evaluation of the hydraulic functioning of the drainage system

From the calibrated model, simulations were carried out introducing the hietograms corresponding to a return time of 2 and 10 years to evaluate the hydraulic functioning of the current system. The extrapolation of precipitation for the years 2030 and 2040 was

also done in the same way. From these simulations, the following aspects were identified: critical points in the drainage system, inspection chambers where backflow occurs, and the prioritization of flood points and flood volumes for possible intervention.

3. Results and Discussion

3.1 Representativeness of the model

In the Eastern Drainage Zone (EDZ) three main sub-basins were identified: (i) Canal Oriental with 12.29 Km², (ii) Canal Autopista 1 with 7.57 Km², (iii) Canal Cañaveralejo 2 with 3.83 Km² (Figure 1). Canal Autopista 1 and Canal Oriental have limnigraphic measurements, and it was possible to calibrate and validate both sub-basins. From the events used in the calibration, the values of the Nash-Sutcliffe index shown in Table 1 were obtained. Figure 2 and 3 show the actual and simulated precipitation level for the period September 30 and October 2, in Canal Autopista and Canal Oriental respectively.

Table 1. Efficiency indices for the three highest rainfall events

| Event | Canal Oriental | Canal Autopista |
|-------------|----------------|-----------------|
| 10/may/2016 | 0.60 | 0.64 |
| 26/may/2016 | 0.54 | 0.61 |
| 02/oct/2016 | 0.87 | 0.51 |

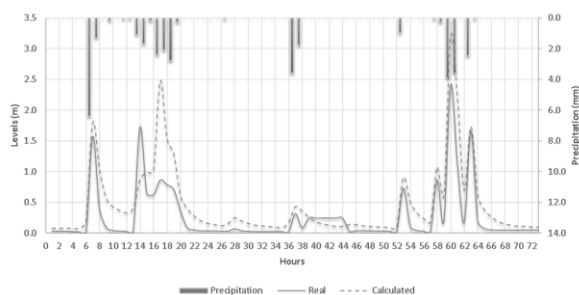


Figure 2. Rain-runoff event in Canal Autopista 1 on 2nd October 2016 (own source)

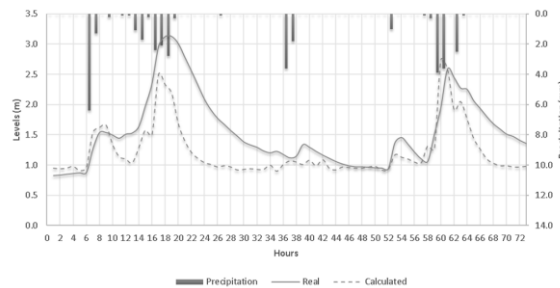


Figure 3. Rain-runoff event in Canal Oriental Medio on 2nd October 2016 (own source)

The calibration of the two channels is considered acceptable, although a greater spatial coverage and better distribution of pluviographic and limnigraphic stations throughout the EDZ, would further facilitate understanding of the hydrological regimes in those areas, and the calibration-validation would shift the Nash-Sutcliffe numbers closer to 1.

3.2 Simulation scenarios of maximum rainfall

The analysis of maximum daily rainfall indicates a positive trend, as represented by the black continuous line (Figure 4), whereby the slope indicates the magnitude of the increase in mm / year.

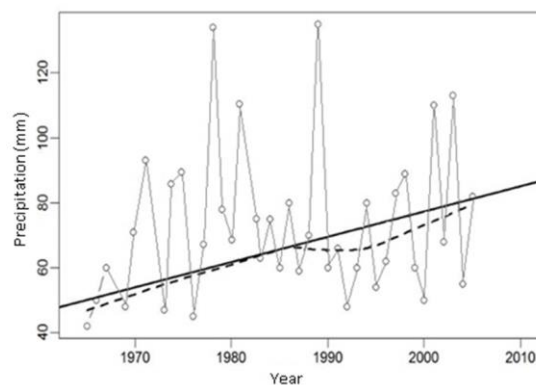


Figure 4. Index RX1 day, maximum daily rainfall (own source)



Figure 5. Hydraulic status of the drainage system in the EDZ for a) the current climate scenario, b) the 2030 climate scenario and c) the 2040 climate scenario (own source)

In Figure 4 the sequence of lines with peaks represent the annual series of the daily maximum precipitation data at the PRC station, and the dotted line represents a smoothed adjustment to the data series, while the solid black line represents the linear trend. In the case of the station Planta Río Cauca, the increase is 0.78 mm / year, the Universidad del Valle station is 0.76 mm / year and the Colegio San Juan Bosco station is 0.77 mm / year. The statistical significance corresponds to 0.018 (higher than 95%), which indicates that the trend is valid according to ⁽³⁵⁾. The results from these projections are consistent with that found in local study trends ^(4,36), which affirm the positive trend in maximum rainfall in 24 hours (RX1day) for the study area.

The construction of the hietograms was made with rainfall duration equivalent to the value of time of concentration 60 minutes, and with return times of 2 and 10 years. From these hietograms and the trend analysis, the maximum rainfall in 24 hours was extrapolated, in order to construct the climatic scenarios for the years 2030 and 2040, registered in Table 2.

Table 2. Magnitude of design storms evaluated in mm

| Climatic Scenario | Station Planta Río Cauca | Station San Juan Bosco College | Station Universidad del Valle |
|-----------------------|--------------------------|--------------------------------|-------------------------------|
| Current. Tr= 2 years | 74 | 73 | 72 |
| Current. Tr= 10 years | 105 | 102 | 99 |
| Future. Year 2030 | 132 | 117 | 115 |
| Future. Year 2040 | 125 | 138 | 145 |

It is evident that the maximum hydraulic capacity of transport in different collectors has already been reached for the current climate scenarios, as well as for the years 2030 and 2040. The percentage of occupation of the pipes and channels increasingly reaches 100%, mainly in the collectors of the Canal Oriental and initial afferent sections of the Canal Autopista. This fact demonstrates the limited useful life of the drainage system in the face of increased rainfall.

For the three climate scenarios, the points where flooding occurs are concentrated in the north-western and central part of the EDZ (Figure 5). In the 2030 and 2040 climatic scenarios, flooding occurs in new points with respect to the

current climate scenario, these are the Canal Oriental Alto and the Colector de Alivio Oriental, the latter marked by a box in Figure 5-C. The Colector de Alivio Oriental was built in 2012 to mitigate flooding in this area, but considering the tendency of increasing rainfall in the area, this type of solution is not permanent. In this sense, the solutions aimed at increasing the network of collectors or their capacity, is limited by the increase in rainfall, in addition to the difficulty of carrying out the work in densely populated parts of the city with little slope, such as the EDZ.

Flood volumes recorded in the inspection chambers vary depending on the climate scenario being evaluated, however the tendency is always for an increase in flood volumes in accordance with the increase in daily maximum rainfall. This fact can be observed in Figure 6.

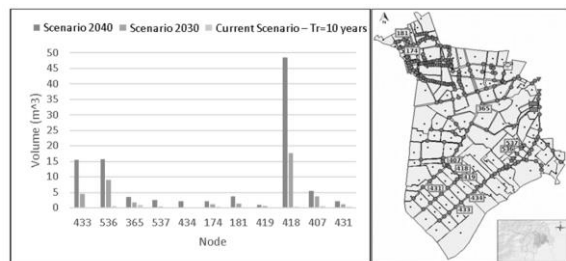


Figure 6. Summary of flood volumes in 10 nodes of the EDZ (own source)

Given the climate scenarios for the year 2030 and 2040, the operation of the drainage system is deficient. The most critical inspection chamber in terms of flood volumes is chamber 418 (located in the Canal Oriental Alto), which has a maximum flood volume of 48 m³ (in 2 hours) in the 2040 climate scenario. Among the benefits of the model constructed, it not only identifies the points where the system fails, but identifies prioritizing actions aimed at mitigating future floods, allowing the optimization of resources. Based on the results shown in Figure 6, intervention should be prioritized in the afferent area of the Oriental Alto (chamber 418), the

Calle 48 (chamber 433) and the Colector de Alivio Oriental (chamber 536).

4. Conclusions

The constructed model is a good approximation of reality, taking into account Nash-Sutcliffe index values above 0.5 in all simulated events, with a descriptive capacity of the drainage networks, facilitating the incorporation of the spatial variability of the physical characteristics of the network and the spatio-temporal variability of precipitation.

The hydraulic operation of the drainage system of the EDZ for the climate scenarios for the years 2030 and 2040 is deficient, taking into account the flood volumes and the new points where backflow occurs, as identified in the SWMM simulations. The 2040 climate scenario presents the highest flood volumes with respect to the 2030 climate scenario and the current climate scenario.

The simulations permit the prioritization of possible interventions for the improvement of the drainage system. Intervention should be prioritized as follows: (i) Canal Oriental Alto, (ii) Canal de la Calle 48, tributary of the Canal Oriental Alto and (iii) the Colector de Alivio Oriental. This conclusion is based on the flood volumes and the population density of the affected area.

The Colector de Alivio Oriental was built to mitigate flooding in an area of the basin, a solution which according to the simulations for the 2030 and 2040 climate scenarios is temporary. This result invites the prioritization of a reduction in runoff, as an alternative management of urban rainwater to the increase in the number and capacity of collectors. The decrease in runoff is achieved by increasing surface retention and increasing infiltration; The modeling done in this research is a useful tool

that facilitates the evaluation of technologies which can help the city to adapt to the effects of climate variability and climate change, through possible hydraulic works, or changes in land use that prepare the east of city for the amortization of floods.

As a recommendation and future line of research, the evaluation of the current system in different scenarios of climate variability and climate change in the implementation of Sustainable Urban Drainage Systems (SUDS) is proposed as an adaptive option to these scenarios, thus potentiating this option provided by the SWMM with the so-called LID's.

5. Acknowledgements

To the research group IREHISA, attached to the School of Engineering of Natural Resources and the Environment (EIDENAR) of Universidad del Valle; to the Faculty of Engineering of Universidad del Ibagué. To the companies EMCALI, IDEAM, DAGMA and CVC that provided the climatological and hydraulic information that were the inputs of the model.

6. References

- (1) Avila-Diaz J, Carvajal-Escobar Y, Gutiérrez S. Análisis de la influencia de El Niño y La Niña en la oferta hídrica mensual de la cuenca del río Cali. *Tecnura* [Internet]. 2014;18(41):120–33. Doi: 10.14483/udistrital.jour.tecnura.2014.3.a09. Available from: <https://revistas.udistrital.edu.co/index.php/Tecnura/article/view/7027/8707>.
- (2) OSSO C. DesInventar Project [Internet]. 1994. [Consultado 2017/03/09]. Available from: <https://www.desinventar.org/es/database>.
- (3) Torres M. Portafolio de medidas de adaptación y mitigación del cambio climático [Internet]. Cali, Colombia: Corporación Autónoma Regional de Valle del Cauca CVC, Centro Internacional de Agricultura Tropical CIAT; 2015. 84 p. Available from: https://ecopedia.cvc.gov.co/sites/default/files/archivosAdjuntos/portafolio_de_estrategias_de_adaptacion_-_santiago_de_cali_0.pdf.
- (4) Cardona-Guerrero F, Avila-Diaz J, Carvajal-Escobar Y, Jimenez H. Tendencias en las series de precipitación en dos cuencas torrenciales andinas del Valle del Cauca (Colombia). *Tecnológicas* [Internet]. 2014;17(32):85–95. Doi: 10.22430/22565337.208. Available from: <https://revistas.itm.edu.co/index.php/tecnologicas/article/view/208/214>.
- (5) Poveda G, Mesa O. Las fases extremas del fenómeno ENSO (El Niño y La Niña) y su influencia sobre la hidrología de Colombia. *Tecnol y Ciencias del Agua* [Internet]. 2015;11(1):21–37. Available from: <http://www.revistatyca.org.mx/ojs/index.php/tyca/article/view/765/726>.
- (6) Poveda G, Vélez JI, Mesa O, Hoyos C, Mejía J, Barco OJ, et al. Influencia de fenómenos macroclimáticos sobre el ciclo anual de la hidrología Colombiana: Cuantificación lineal, no lineal y percentiles probabilísticos. *Meteorol Colomb* [Internet]. 2002;(6):121–30. Available from: http://gfnun.unal.edu.co/fileadmin/content/geociencias/revista_meteorologia_colombiana/numero06/06_13.pdf.
- (7) Waylen P, Poveda G. El Niño-Southern Oscillation and aspects of western South American hydro-climatology. *Hydrol*

- Process [Internet]. 2002;16(6):1247–60. Doi: 10.1002/hyp.1060. Available from: <https://onlinelibrary.wiley.com/doi/epdf/10.1002/hyp.1060>.
- (8) Franco AS. Momento y contexto de la violencia en Colombia. *Revista Cubana de Salud Pública* [Internet]. 2002; 29(1): 18-36.
- (9) Zoppou C. Review of urban storm water models. *Environ Model Softw* [Internet]. 2001;16(3):195–231. Doi: 10.1016/S1364-8152(00)00084-0. Available from: <https://www.sciencedirect.com/science/article/pii/S1364815200000840>.
- (10) Rossman LA, Huber WC. Storm Water Management Model Reference Manual Volume I – Hydrology (revised)(EPA/600/R-15/162A) [Internet]. Vol. I, U.S. Environmental Protection Agency. Washington, DC; 2016 [Consulted 2017/07/20]. Available from: https://cfpub.epa.gov/si/si_public_record_report.cfm?Lab=NRMRL&dirEntryId=309346.
- (11) Puertas-Orozco O, Carvajal-Escobar Y, Quintero-Angel M. Estudio de tendencias de la precipitación mensual en la cuenca alta-media del río Cauca, Colombia. *DYNA* [Internet]. 2011;78(169):112–20. Available from: <https://revistas.unal.edu.co/index.php/dyna/article/view/21330/26516>.
- (12) Avila-Diaz J, Carvajal-Escobar Y, Sedano K. Análisis De Aspectos Que Incrementan El Riesgo De Inundaciones En Colombia. *Luna Azul* [Internet]. 2013;(37):219–38. Doi: 10.17151/luaz.2013.37.13. Available from: http://190.15.17.25/luazul/downloads/Lunazul37_14.pdf.
- (13) Puertas-Orozco O, Carvajal-Escobar Y. Incidencia de El Niño-Oscilación del Sur en la precipitación y la temperatura del aire en Colombia, utilizando el Climate Explorer. *Rev Científica Ing y Desarro* [Internet]. 2011;23(23):104-118–118. Available from: <http://rcientificas.uninorte.edu.co/index.php/ingenieria/article/view/2097/1346>.
- (14) Poveda G. La Hidroclimatología de Colombia: Una Síntesis Desde la Escala Inter-Decadal Hasta la Escala Diura por Ciencias de La Tierra. *Rev la Acad Colomb Ciencias Exactas, Físicas y Nat* [Internet]. 2004;28(107):201–22. Available from: https://www.uninorte.edu.co/documents/266486/0/Poveda_2004.pdf.
- (15) Materón H, Carvajal-Escobar Y. Curvas de Intensidad, Frecuencia y Duración de Lluvias para Cali: Actualización y Consideraciones. *Ing y Compet* [Internet]. 1997;1(1):29–35. Doi: 10.25100/iyc.v1i1.2362. Available from: http://revistaingenieria.univalle.edu.co/index.php/ingenieria_y_competitividad/article/view/2362/3112.
- (16) Wang K-H, Altunkaynak A. Comparative Case Study of Rainfall-Runoff Modeling between SWMM and Fuzzy Logic Approach. *J Hydrol Eng* [Internet]. 2012;17(2):283–91. Doi: 10.1061/(ASCE)HE.1943-5584.0000419. Available from: <https://ascelibrary.org/doi/pdf/10.1061/%28ASCE%29HE.1943-5584.0000419>.
- (17) Bhaduri B, Minner M, Tatalovich S, Harbor J. Long-Term Hydrologic Impact

- of Urbanization: A Tale of Two Models. *J Water Resour Plan Manag* [Internet]. 2001;127(1):13–9. Doi: 10.1061/(ASCE)0733-9496(2001)127:1(13). Available from: <https://ascelibrary.org/doi/pdf/10.1061/%28ASCE%290733-9496%282001%29127%3A1%2813%29>.
- (18) Hsu MH, Chen SH, Chang TJ. Inundation simulation for urban drainage basin with storm sewer system. *J Hydrol* [Internet]. 2000;234(1–2):21–37. Doi: 10.1016/S0022-1694(00)00237-7. Available from: <https://www.sciencedirect.com/science/article/pii/S0022169400002377>.
- (19) SAINT-VENANT AJC, BARRÉ D, Saint-Cyr J. Théorie du mouvement non-permanent des eaux, avec application aux crues des rivières et à l'introduction des marées dans leur lit. *C. R. Acad Sci Paris* [Internet]. 1871;73:237–40. Available from: <https://www.sciencedirect.com/journal/comptes-rendus-mathematique>.
- (20) Butler D, Davies J, Nicholson T. *Urban Drainage* [Internet]. 2nd Edition. London: CRC Press; 2004. p. 566. Doi: 10.1201/b12810. Available from: <https://www.taylorfrancis.com/books/9780429217357>.
- (21) Rossman LA. *Epa SWMM 5.0 Quality assurance report: Dynamic Wave Flow Routing* [Internet]. Washington, DC; 2006. Available from: <https://nepis.epa.gov/Exe/ZyPDF.cgi/P10089TF.PDF?Dockkey=P10089TF.PDF>.
- (22) Horton RE. The Role of Infiltration in The Hydrologic Cycle. *Eos, Trans Am Geophys Union* [Internet]. 1933;14(1):446–60. Doi: 10.1029/TR014i001p00446. Available from: <https://agupubs.onlinelibrary.wiley.com/doi/10.1029/TR014i001p00446>.
- (23) Peña JA. Evaluación de los efectos en las propiedades hidrodinámicas de un suelo inceptisol y en el desarrollo de un cultivo de caña de azúcar (*saccharum officinarum* l.) por la aplicación de biosólidos provenientes de la PTAR Cañaveralejo de Cali. *Ing Recur Nat y del Ambient* [Internet]. 2012;(11):51–62. Available from: <http://revistaeidenar.univalle.edu.co/revista/ejemplares/11/g.htm>.
- (24) Nash J, Sutcliffe J. River flow forecasting through conceptual models part I — A discussion of principles. *J Hydrol* [Internet]. 1970;10(3):282–90. Doi: 10.1016/0022-1694(70)90255-66. Available from: <https://www.sciencedirect.com/science/article/pii/0022169470902556>.
- (25) EMCALI EM de C. Normas para el diseño de sistemas de alcantarillado [Internet]. Cali, Colombia; 1999. Available from: <https://www.emcali.com.co/web/acueducto/normas-1999>.
- (26) Ortíz JCR, Muñoz MF. Diseño Hidráulico de Sistemas de Drenaje Dual a través del Modelo SWMM. *Rev Ing Hidráulica y Ambient* [Internet]. 2013;34(2):103–17. Available from: <http://riha.cujae.edu.cu/index.php/riha/article/view/156/153>.
- (27) Sánchez LA. Modelo hidrológico-hidráulico para evaluar un sistema de drenaje urbano en zonas planas. *Rev Ing Hidráulica y Ambient* [Internet].

- 2009;30(3):3-10. Available from: <http://riha.cujae.edu.cu/index.php/riha/article/view/65/68>.
- (28) Bolinaga J. Drenaje Urbano. Caracas, Venezuela: Instituto Nacional de Obras Sanitarias; 1979. 470 p.
- (29) Rojas E, Arce B, Peña A, Boshell F, Ayarza M. Cuantificación e interpolación de tendencias locales de temperatura y precipitación en zonas alto andinas de Cundinamarca y Boyacá (Colombia). *Cienc y Tecnol Agropecu* [Internet]. 2010;11(2):173-82. Doi: 10.21930/rcta.vol11_num2_art:209. Available from: <http://revistacta.agrosavia.co/index.php/revista/article/view/209/215>.
- (30) Zongxing L, He Y, Wang P, Theakstone W, An W, Wang X, et al. Changes of daily climate extremes in southwestern China during 1961–2008. *Glob Planet Change* [Internet]. 2012;80–81:255–72. Doi: 10.1016/j.gloplacha.2011.06.008. Available from: <https://www.sciencedirect.com/science/article/pii/S092181811100110X>.
- (31) Skansi M de los M, Brunet M, Sigró J, Aguilar E, Arevalo J, Bentancur O, et al. Warming and wetting signals emerging from analysis of changes in climate extreme indices over South America. *Glob Planet Change* [Internet]. 2013;100:295–307. Doi: 10.1016/j.gloplacha.2012.11.004. Available from: <https://www.sciencedirect.com/science/article/pii/S0921818112002172>.
- (32) CDKN AC y D. El Quinto Reporte de Evaluación del IPCC ¿Qué implica para Latinoamérica? [Internet]. Alianza Clima y Desarrollo. 2014. Available from: <https://cdkn.org/wp-content/uploads/2014/12/INFORME-del-IPCC-Que-implica-para-Latinoamerica-CDKN.pdf>.
- (33) IDEAM, PNUD, MADS, DNP, CANCELLEERÍA. Nuevos Escenarios de Cambio Climático para Colombia 2011-2100 Herramientas Científica para los Tomadores de Decisione- Enfoque Nacional - Departamental: Tercera Comunicación Nacional de Cambio Climático. [Internet]. Vol. 13, BMC Genetics. 2015. Available from: http://documentacion.ideam.gov.co/openbiblio/bvirtual/022964/documento_nacional_departamental.pdf.
- (34) CVC, CIAT, DAGMA. Plan de adaptación y mitigación al cambio climático para Santiago de Cali [Internet]. [Recurso electrónico]. 2015. Available from: <http://web1.cali.gov.co/descargar.php?idFile=9461&plantilla=admin>.
- (35) Zhang X, Yang F, Canada E. RCLimDex (1.0) User Manual [Internet]. Ontario, Canada: Climate Research Division Environment Canada; 2004. Report No.: 1.1. Available from: <http://etccdi.pacificclimate.org/software.shtml>.
- (36) Avila A, Cardona-Guerrero F, Carvajal-Escobar Y, Justino F. Recent precipitation trends and floods in the Colombian Andes. *Water (Switzerland)* [Internet]. 2019;11(2):1–22. Doi: 10.3390/w11020379. Available from: <https://www.mdpi.com/2073-4441/11/2/379>.



Revista Ingeniería y Competitividad por Universidad del Valle se encuentra bajo una licencia Creative Commons Reconocimiento - Debe reconocer adecuadamente la autoría, proporcionar un enlace a la licencia e indicar si se han realizado cambios. Puede hacerlo de cualquier manera razonable, pero no de una manera que sugiera que tiene el apoyo del licenciador o lo recibe por el uso que hace