

Coupling of heterogeneous photocatalysis and aerobic biological process of activated sludge to treat wastewater containing Chlorpyrifos

INGENIERÍA SANITARIA Y AMBIENTAL

Acople de fotocátalisis heterogénea y proceso biológico aerobio de lodos activados para tratar aguas residuales con contenido de Clorpirifos

Dorancé Becerra^{1§}, Brenda L Arteaga¹, Yuriney E Ochoa¹, Andrés F Barajas-Solano¹, Janet B García-Martínez¹, Luisa F Ramírez¹

¹*Universidad Francisco de Paula Santander, Departamento de Ciencias del Medio Ambiente, Ingeniería Ambiental, Norte de Santander, Colombia*

[§]*dorancebm@ufps.edu.co, brendaluciaac@ufps.edu.co, yurineyelizabethor@ufps.edu.co, andresfernandobs@ufps.edu.co, janetbibianagm@ufps.edu.co, luisaframirezr@ufps.edu.co*

(Recibido: 27 de Junio de 2019 - Aceptado: 30 de Julio de 2019)

Abstract

Chlorpyrifos is one of the most commonly used pesticides in Colombia, being the most commonly used in the department of Norte de Santander, where its usefulness has been proven to protect crops of rice, coffee, etc. However, due to improper use by farmers, this has brought negative consequences for the environment and the health of people, which is why in 2014 there were 715 cases of poisoning by this substance in the department. In order to generate a technically viable alternative for the treatment of agricultural wastewater containing Chlorpyrifos and advancing in the decontamination of receiving water bodies, the effectiveness of the heterogeneous photocatalysis coupling in a Composite Parabolic Collector - CPC and an aerobic biological process of activated sludge in batch. The photocatalysis was performed in a CPC of 0.83 m², using sunlight as a source of energy (20, 40 and 60 KJ.L⁻¹) and titanium dioxide - TiO₂ Degussa P25 as a catalyst (100, 350 and 600 mg. L⁻¹), at a pH of 3, 6 and 9 and as an aerobic biological process the Zahn-Wellens Test was used. The photocatalytic process achieved a maximum DQO removal of 44.2% and COD of 35.3%, for optimal conditions 159.19 mg.L⁻¹ of TiO₂ and 3.47 pH units. The

biological process managed to degrade 17.0% of DQO and 9.3% of COD for wastewater without pretreatment. After pretreatment by photocatalysis, the removal of the biological process increased to 88.2% DQO and 67.8% COD. From the results obtained, it is established that the coupling of heterogeneous photocatalysis and an aerobic biological process is a viable alternative for the treatment of agricultural wastewater with the presence of Chlorpyrifos.

Keywords: *Activated Sludges, Compound Parabolic Collector (CPC), Heterogeneous Photocatalysis, Pesticides, Zahn Wellenes Test.*

Resumen

El Clorpirifos es uno de los plaguicidas que más se utiliza en Colombia, siendo el de mayor uso en el departamento de Norte de Santander, en donde su utilidad ha sido comprobada para proteger cultivos de arroz, café, etc. No obstante, debido al uso inadecuado por parte de los agricultores, este ha traído consecuencias negativas para el medio ambiente y la salud de las personas, es así como para el año 2014 se registraron 715 casos de intoxicación por esta sustancia en el departamento. Con el fin de generar una alternativa técnicamente viable para el tratamiento de las aguas residuales agrícolas con contenido de Clorpirifos y avanzar en la descontaminación de los cuerpos de agua receptores, se evaluó la eficacia del acople de fotocatalisis heterogénea en un Colector Parabólico Compuesto - CPC y un proceso biológico aerobio de lodos activados en batch. La fotocatalisis se realizó en un CPC de 0.83 m², usando luz solar como fuente de energía (20, 40 y 60 KJ.L⁻¹) y dióxido de titanio - TiO₂ Degussa P25 como catalizador (100, 350 y 600 mg.L⁻¹), a pH de 3, 6 y 9 y como proceso biológico aerobio se utilizó el Test de Zahn-Wellens. El proceso fotocatalítico alcanzó una remoción máxima de DQO del 44.2% y COD del 35.3%, para condiciones óptimas 159.19 mg.L⁻¹ de TiO₂ y 3.47 unidades de pH. El proceso biológico logró degradar el 17.0% de DQO y 9.3% del COD para el agua residual sin pretratamiento. Después del pretratamiento mediante fotocatalisis, la remoción del proceso biológico aumentó a un 88.2% de DQO y 67.8% de COD. De los resultados obtenidos se establece que el acople de fotocatalisis heterogénea y un proceso biológico aerobio, es una alternativa viable para el tratamiento de aguas residuales agrícolas con presencia de Clorpirifos.

Palabras clave: *Colector Parabólico Compuesto (CPC), Fotocatalisis Heterogénea, Lodos Activados, Plaguicidas, Test de Zahn Wellenes.*

1. Introduction

The department of Norte de Santander is renowned for its agricultural production, mainly coffee, rice, and cocoa. Based on the primary information collected through a survey applied to coffee growers and rice farmers in the study area, it was determined that Chlorpyrifos is one of the most widely used agrochemicals in this type of crop. This type of substance is usually spread over the crop employing fumigation equipment, which, when cleaned, causes liquid waste that subsequently reaches water sources, which alter its composition and cause contamination.

Due to the presence of pesticides in water sources, different investigations have been

carried out for the removal of contaminants. For this reason, research such as that carried out by Thind, P., Kumari, D. and John, S ⁽¹⁾ on ultraviolet photocatalysis using Chlorpyrifos TiO₂ / H₂O₂, developed at the University of Technology, Chandigarh India; determined the optimal conditions for this type of compounds. According to the results, it was possible to obtain a degradation of 68.29% of the COD. On the other hand, Berberidou, C., Kitsiou, V., Lambropoulou, D., Antoniadis, A., Ntonou, E., Zalidis, G. and Poulis, I ⁽²⁾, evaluated an alternative method for water treatment residuals with pesticide content at the Aristotle University of Thessaloniki, Thessaloniki, Greece, in which solar photocatalytic oxidation and constructed wetlands were used, thereby obtaining 87% COD removal.

The aim of this study is to evaluate the efficiency of a two-step system of heterogeneous photocatalysis coupled with aerobic biological process, as a sustainable process for the removal of Chlorpyrifos on agricultural wastewater; and thereby minimize the impact of pesticides on the local agricultural community of Norte de Santander.

2. Methodology

2.1. Wastewater characterization

Samples of the fumigation equipment cleaning were taken after applying the pesticide in a coffee crop in the village of El Alto, in the municipality of Bucarasica and a rice crop in the village of El Encanto (Cúcuta, Norte de Santander). Subsequently, its physicochemical characterization was carried out, and from this characterization, synthetic samples similar to the original ones with which the research tests were performed were prepared. The parameters analyzed were: Chemical Oxygen Demand - COD, pH, Temperature, and Dissolved Organic Carbon - COD⁽³⁾.

2.2. Sludge characterization

Aerobic sludge from a domestic wastewater treatment plant was used as inoculum. The sample was analyzed to determine its quality and potential for use in the treatment of wastewater. The parameters analyzed were Total Suspended Solids (SST), Volatile Suspended Solids (SSV), Hydrogen Potential (pH), Sludge Volume Index (IVL), and Oxygen Consumption Rate⁽³⁾.

2.3. Breathing inhibition test

The toxic effect of the pollutant load of the wastewater on the microorganisms present in the inoculum sludge was determined through the method of Inhibition of Respiration for Activated Sludge - OECD 209⁽⁴⁾ was used. Chlorpyrifos concentrations equivalent to 0, 200,

400, 600 and 800 mgO₂.L⁻¹ of COD were evaluated against a sludge volume equivalent to 1200 mg.L⁻¹ of SSV in a 300 mL container. The percentage inhibition of Chlorpyrifos on microorganisms was calculated using Eq. 1.

$$\text{Inhibition percentage} = \left(1 - \frac{R_s}{R_c}\right) \times 100 \quad (\text{Eq. 1})$$

2.4. Biodegradability test

Biodegradability of the samples was determined from the Zahn-Wellens EMPA - OECD 302B method⁽⁵⁾. For the samples, eight 1L amber glass flasks were prepared as presented in Figure 1. 3 with samples were used for monitoring the biodegradability of Chlorpyrifos (RT) (Table 1). two flasks without pesticide samples (RB). Two flasks as control reactors (RC) and one flask as volatilization control vessel (RV). Each of the tests had a duration of 28 days.

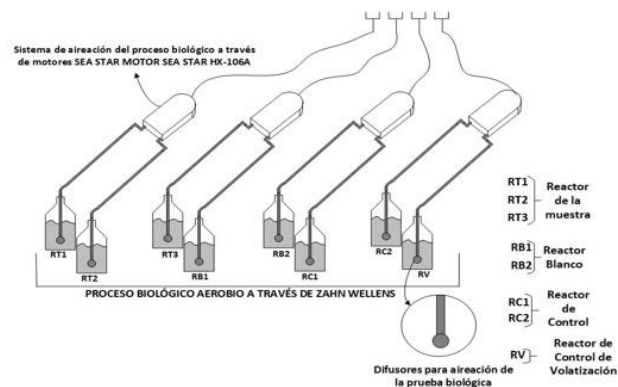


Figure 1. Sample monitoring through Zahn Wellens method

The percentage of biodegradation of Chlorpyrifos was evaluated in terms of COD and COD. The first sample was taken 3.5 hours after starting the test, and subsequently every 4 days until the end of the test. The percentage of biodegradation was determined by Eq. 2.

$$\% Bt = \left|1 - \left(\frac{RT_i - RB_i}{RT_0 - RB_0}\right)\right| \times 100 \quad (\text{Eq. 2})$$

Table 1. Sample preparation

	Sample reactors			
	RT	RB	RC	RV
Zahn wellens media (mL)	741	741	741	741
Sludge (mg.L ⁻¹ of SSV)	1200	120 0	1200	0
Chlorpyrifos (mgO ₂ .L ⁻¹ of COD)	400	0	Ethylene Glycol as reference compound	400

2.5. Evaluation of photodegradation of wastewater containing Chlorpyrifos


The photocatalysis process was carried out in a Laboratory Scale-CPC Composite Parabolic Collector (Figure 2), using titanium dioxide - TiO₂ Degussa P25 as a catalyst, sunlight as an energy source and a hydrogen peroxide concentration of 100 ppm⁽¹⁾. The CPC was located in the North-South direction, taking into account the path of solar irradiation in Cúcuta⁽⁶⁾, looking for a plane perpendicular to the sun's rays and thus having greater efficiency in the collection of solar radiation.

The UV radiation was measured by adapting an SP110 Pyranometer solar radiation sensor with a UNI-T UT71C multimeter. The samples were taken at accumulated energies of 0, 20, 40, and 60 KJ.L⁻¹, taking into account the levels used by Becerra⁽⁷⁾, to perform monitoring of degradation by COD. Accumulated energy measurements were calculated, taking into account Eq. 3⁽⁸⁾.

$$Q_n = Q_{n-1} + \Delta t_n \cdot I_n \cdot A_f \cdot V_T^{-1} \quad (\text{Eq. 3})$$

The experimental design consisted of a non-factorial design 3² (three levels, two factors). The variables evaluated were the pH and catalyst concentration according to a study reported by Malato, et al. S.f.⁽⁹⁾; Also, the percentage (%) of

degradation expressed in terms of COD was used as the response variable. The evacuated pH was established, taking into account what was reported by Thind et al.⁽¹⁾; also, the catalyst concentrations were fixed according to those used by García⁽¹⁰⁾. The levels used in pesticide degradation are shown in Table 2, and its resolution in Table 3.

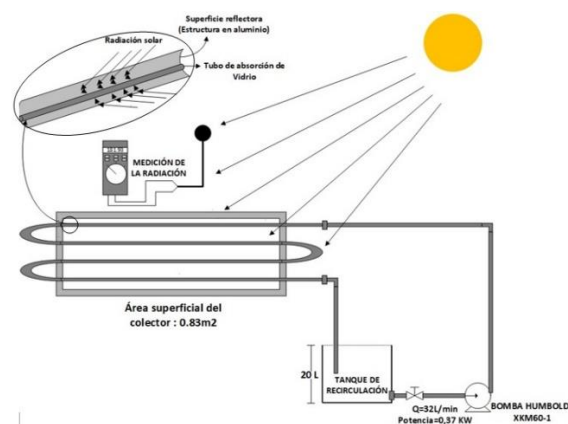**Figure 2.** Assembly of CPC equipment**Table 2.** Variables of the experimental design

Factors	Low	Medium	High
TiO ₂ (mg.L ⁻¹)	100.0	350.0	600.0
pH	3.0	6.0	9.0

Table 3. Full design for the variables selected

Experiment	Block	TiO ₂ (mg.L ⁻¹)	pH
1	1	100	9
2	1	350	6
3	1	600	3
4	1	600	9
5	1	600	6
6	1	100	3
7	1	100	6
8	1	350	6
9	1	350	9
10	1	350	3

Finally, the degradation percentage of the sample studied was applied in Eq. 4 ⁽¹⁾.

$$\text{COD degradation (\%)} = \frac{C_i - C_f}{C_i} \times 100 \quad (\text{Eq. 4})$$

2.6. Coupling of photocatalytic and biological processes

From the optimal operating conditions of the process by photocatalysis obtained from the design of experiments, results obtained from the design of experiments, the wastewater was treated using accumulated energy of 60 KJ.L⁻¹, using 100 mg.L⁻¹ peroxide of hydrogen and 400 mgO₂.L⁻¹ of COD of wastewater.

Once the process was finished, the photo treated water was filtered, the pH was neutralized, and its biodegradability ⁽⁵⁾ was determined, as seen in Figure 3.

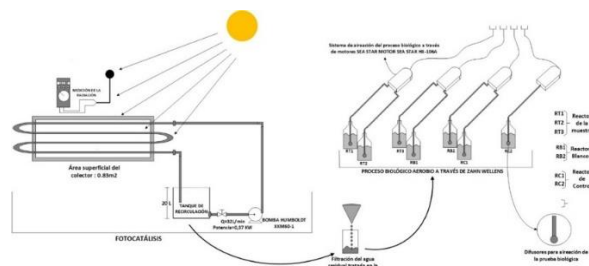


Figure 3. Coupling of photocatalytic and biological processes

3. Results and discussion

3.1. Wastewater characterization

According to the results obtained (Table 4), the values of COD from the coffee crops double the permissible limit value in point discharges of non-domestic wastewater (150 mgO₂.L⁻¹), established in resolution 0631 of 2015 ⁽¹¹⁾. On the other hand, the samples show COD concentrations of 73 and 46.3 mg.L⁻¹, respectively. These results are within the COD range of rivers contaminated with pesticides in Colombia ⁽¹²⁾. This type of analysis is essential

since organic carbon is considered as the most common cause of water quality damage ⁽¹³⁾.

Table 4. Characterization of wastewater from coffee and rice crops

Parameters	Coffee crops	Rice crops
COD (mg O ₂ .L ⁻¹)	340.54	129.73
pH	8.32	7.90
Dissolved Organic Carbon (mg.L ⁻¹)	73.00	46.37
Temperature (°C)	23.40	26.50

When performing the pH and temperature analyzes at the sampling sites, a pH of 8.32 and 7.9 and a temperature of 23.4 and 26.5°C were found for the water samples of the coffee and rice crop respectively. From these results, it can be inferred that the temperature allows the implementation of possible aerobic biological treatments since these processes are active up to temperatures close to 50°C ⁽¹⁴⁾. Regarding the pH, it is possible to determine that it complies with current regulations since it is within the range of 6 to 9, this water being suitable for the development of biological processes ⁽¹⁴⁾. Finally, taking into account the results obtained for COD and COD concentrations, it is observed that the discharge of these waters can induce the contamination of water sources and the reduction of the conditions for aquatic life of both animal and plant species ⁽¹⁴⁾.

3.2 Sludge characterization

Table 5 shows that aerobic sludge possesses optimal characteristics for the development of biodegradability tests; since its pH (7.9) can allow the optimal reproduction of microorganisms and increase the sedimentation of organic load ⁽¹⁵⁾. On the other hand, the IVL was determined for the pure sludge and a 1: 4 dilution, whose result was 66.15 ml.g⁻¹, a value that is below 80 ml.g⁻¹ indicating that the sludge has proper compaction and sedimentation

characteristics of flocculent biomass ⁽¹⁶⁾. On the other hand, the IVL value was determined for the pure sludge and a 1: 4 dilution, whose result was 66.15 ml.g⁻¹, a value that is below 80 ml.g⁻¹ indicating that the sludge has proper compaction and sedimentation characteristics of flocculent biomass ⁽¹⁶⁾. Finally, the Oxygen Consumption Rate was determined, obtaining a value of 17.97 mg O₂ g⁻¹ SSV.h, which is in the range of 12 to 20 mg O₂ g⁻¹ SSV.h, indicating that the mud has a normal TCO. This represents good sedimentation, low probability of toxic presence, high biological activity, and timely microbial growth ⁽⁷⁾.

Tabla 5. Characterization of sludge

Parameters	Values
Total Suspended Solids (mg.L ⁻¹)	45,529.33
Suspended Volatile Solids (mg.L ⁻¹)	16,450.66
Sludge Volumetric index (ml.g ⁻¹)	66.15
Oxygen Consumption rate (mg O ₂ g ⁻¹ SSV.h)	17.97
pH	7.90

3.3. Breathing inhibition test

Table 6 shows that the inhibition percentages behave proportionally to the concentration of agricultural wastewater; the higher the concentration, the greater the inhibition. From this information, a curve was constructed with the percentages of inhibition based on COD concentrations. The latter allowed us to determine the effective concentration that causes a 50% reduction (EC50). According to the results obtained, the interpolation of the graph was 550.47 mg.L⁻¹. The latter corresponds to the limit value of concentration possible in biodegradability tests. To develop the tests under aerobic biological processes, a base concentration of 400 mg.L⁻¹ was used, which

corresponds to an inhibition percentage of 46%, below the EC50.

Table 6. Results for the inhibition test

Concentration (mg.L ⁻¹)	Slope	Oxygen Consumption rate (mg O ₂ g ⁻¹ SSV.h)	Inhibition percentage (%)
0	0.3595	17.975	0.00
200	0.3285	16.425	8.62
400	0.1932	9.66	46.26
600	0.1672	8.36	53.49
800	0.1038	5.19	71.13

3.4. Biodegradability test

The results of the biodegradation in terms of COD and COD can be found in Table 7. From the follow-up to the different tests performed, it was found that the pH was within the optimum range of 6-8.5, which is stipulated in the OECD 302B⁽⁵⁾, in which microorganisms can reproduce and develop properly ⁽¹⁷⁾. Likewise, the average temperature of the experiments remained at 26°C, being optimal for the development of the bacterial activity, since it is below the maximum limit of 50°C ⁽¹³⁾. Therefore, these parameters were not a limiting factor in the activity of degradation by microorganisms.

According to the results, the sludge employed as inoculum was suitable for the biodegradation process; since the ethylene glycol (control reactor, or RC) was degraded entirely before the 14th day of the test. The above is following the provisions for the Zahn Wellens test, in which it is required that the percentage of degradation after 14 days must be higher than 70%.

On the other hand, the reactors containing the test substance (RT) presented 64% COD removal and 100% COD at 28 days after the test. Finally, in the volatilization reactors (RV), 83% of the COD and 91% of the COD were removed, so it can be inferred that the pesticide was

transported to the atmosphere and did not biodegrade. During the activated sludge process, there is a risk of volatilization of certain compounds, mainly due to the diffusion of the air or the turbulence that it generates when entering the reactors ⁽¹⁷⁾. A similar case occurred in the study of Barba & Becerra ⁽¹⁸⁾, in which pesticide 2.4 D was removed due to physical volatilization phenomena and not biochemical processes. A result that is important to highlight that the organic matter contained in the sample reactor (RT) was not volatilized; This is due to a fast change in the concentration of COD (from 400 to 260 mgO₂.L⁻¹ in 3.5 hours).

Table 7. COD and DOC biodegradation in samples.

Time (days)	COD Biodegradation (%)			DOC Biodegradation (%)		
	RT*	RC**	RV***	RT*	RC**	RV***
0,15	0	0	0	0	0	0
4	58	100	33	40	98	5
8	67	78	50	23	86	23
12	76	89	67	64	100	53
16	82	96	67	66	94	60
20	82	93	67	62	100	80
24	64	93	83	74	98	89
28	64	100	83	100	84	91

*reactors with the sample, **Control reactors with Ethylene Glycol, ***Volatilization control reactors.

The adsorption of the pesticide in the aerobic sludge could occur because the organic matter adheres to the floc and the deposited residue oxidizes as the aeration enters ⁽¹⁷⁾. However, the degradation was not active when there was evidence of a possible accumulation of non-biodegradable and toxic compounds that inhibited the microorganisms, causing their death and immobilization, thus preventing degradation of the contaminating organic load of agricultural wastewater containing Chlorpyrifos ⁽¹⁹⁾. This is corroborated by the reduction of volatile suspended solids. The latter is consistent with the studies carried out by Marcelino et al., ⁽²⁰⁾ and Becerra ⁽⁷⁾, in which they found that the test substances present in wastewater are

absorbed in the aerobic sludge, rather than mineralized. Research carried out in Europe by Greenpeace ⁽²¹⁾, has shown that the volatilization phenomena presented by aerobic biological treatments affect, both directly and indirectly, the quality of natural resources and biodiversity. Studies have determined at least 53 pesticides in samples of captured pollen and approximately 17 in samples of honeycomb pollen; Chlorpyrifos is one of the 7 agrochemicals detected that harm bee.

Finally, it can be concluded that the biological process studied was not efficient for the degradation of the contaminating organic load of agricultural wastewater containing Chlorpyrifos, since volatilization phenomena caused the removal of the pesticide. Therefore, it is necessary to couple it with an advanced oxidation process, to treat effluents with toxic substances that inhibit the microorganisms of biological processes.

3.5. Evaluation of photodegradation of wastewater containing Chlorpyrifos

Table 8 shows the results of the analysis of variance (ANOVA), where it was found that the model is statistically significant, since the maximum error accepted by the test is 5% and in this case 3 of the 5 effects present P values below 0.05, representing a 95% level of confidence in the results.

On the other hand, it can be affirmed that the quadratic model is adequate to describe the relationship that exists between the variables that affect the percentage of photocatalytic degradation since at least 3 degrees of freedom must be available and, in this model, there are 4 ⁽²²⁾. Likewise, it presented an R² correlation of 0.9437, being close to 1, reducing the probable causes of error by 5.63%. Taking into account the results, it was shown that the pH has a more significant effect than the catalyst concentration on the percentage of degradation.

Tabla 8. ANOVA table

Source	Sum of squares	Liberty degrees	Medium Square	F-value	P-Value
A:Concentración de TiO ₂	223.626	1	223.626	10.67	0.0309
B:pH	739.038	1	739.038	35.26	0.0040
AA	105.885	1	105.885	5.05	0.0879
AB	98.8036	1	98.8036	4.71	0.0957
BB	183.018	1	183.018	8.73	0.0418
Total error	83.8398	4	20.9599		
Total (corr.)	1490.19	9			
Model correlation	R ² = 94.37%				
	R ² (adjusted from the liberty degrees) = 87.34%				

Taking into account the above, the degradation will be more efficient in acid medium, as cited in Blanco et al. ⁽⁹⁾, in which it is explained that the photocatalytic process is more efficient in a range of 3 to 5 pH units. Likewise, the TiO₂ catalyst acts better in smaller quantities; this happens due to that at higher concentrations the residual water can be supersaturated with said catalyst and prevent the entry of the sun's rays and consequently decrease the degradation of the pesticide ⁽¹⁾.

3.5.1 Regression coefficients and surface

From the results, it was possible to construct a quadratic equation (Eq 5) that explains the behavior of the variables and maximizes the degradation of chlorpyrifos in the evaluated sample (Figure 4).

$$\begin{aligned} \text{Degradation (\%)} = & 30.9363 + 0.011268 * \\ & \text{TiO}_2 \text{ concentration} + 5.78979 * \text{pH} - \\ & 0.000107783 * (\text{TiO}_2 \text{ concentration})^2 + \\ & 0.00662667 * \text{TiO}_2 \text{ concentration} * \text{pH} - \\ & 0.984048 * (\text{pH})^2 \end{aligned} \quad (\text{Eq. 5})$$

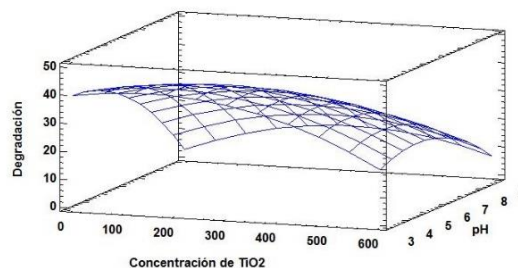


Figure 4. Surface response

In Figure 4, the region between the concentrations of 100-300 mg.L⁻¹ of TiO₂ and pH of 3-5 represents the combination of optimal pH and concentration, where the highest percentage of degradation is generated. Finally, the photodegradation of the contaminant load of the wastewater containing chlorpyrifos had a degradation percentage of 44.18%, similar to that achieved by Thind et al.,⁽¹⁾ of 68.29%, and that obtained by Duarte of 56% for the degradation of thiodan 35⁽²³⁾. It is important to highlight that despite not achieving total mineralization, it is considered that heterogeneous photocatalysis is an interesting alternative to treat wastewater containing pesticides, since it allows to obtain effluents with a low concentration of organic compounds.

3.6 Coupling of photocatalytic and biological processes

For the development of a coupling process between a photocatalytic and biological method, the operational conditions obtained in the previous phases were used. The percentage of degradation of chlorpyrifos was monitored employing COD and COD analysis at 60 kJ.L⁻¹, obtaining the results of Table 9. Results shown a COD degradation of up to 47%. This value is within the predictions of the developed model (30.13 to 52.84%).

Table 9. Degradation of the sample after the photocatalytic process

Photocatalysis	COD (mgO ₂ /L)	COD (ppm)
Inicial value	551.35	69.62
Final value	194.59	36.77
Degradation (%)	64.71	47.19

The effluent obtained from the photocatalytic process was filtered, and a volume of nutrients and a volume equivalent to 1,200 mg.L⁻¹ of SSV was added, as shown in Table 10. The biological process lasted 28 days.

Table 10. Characteristics of the sludge employed

	Sludge
TSS (mg.L ⁻¹)	35.986
VSS (mg.L ⁻¹)	12.246
IVL (mL.g ⁻¹)	76.70

It was observed that the sludge retained its quality since its SSV content was high and the IVL was below 80 mL.g⁻¹, presenting proper compaction and sedimentation characteristics. The biodegradability test was monitored using the parameters of pH, temperature, SSV, COD, and COD.

The biological test presented an average value of approximately 27°C and pH 6-8.5, is optimal for the development of the bacterial activity^(15,17,24); Also, the reference compound exhibited a degradation higher than 70% in less than 14 days, as cited in NTC 4255.

Finally, the efficiency of the entire process was evaluated in terms of COD and COD, obtaining oxidation of organic matter of 88.24% and mineralization of 67.78% (Table 11). Also, the effluent studied showed low

COD concentrations, which is below the maximum discharge limit for non-domestic wastewater, cited in resolution 0631 of 2015⁽¹¹⁾. These results allow us to deduce that the coupled process is effective in reducing pesticide levels.

Table 11. Result of the coupled treatment

Coupled treatment	COD (mgO ₂ /L)	COD (ppm)
Inicial value	551.35	69.62
Final value	64.86	22.43
Degradation (%)	88.24	67.78

Taking into account the previous results it is possible to conclude that the wastewater subjected to coupling process was not wholly mineralized, and only a fraction of this waste was transformed into carbon dioxide, and water and the other part was transformed into intermediates⁽²⁵⁾. Also, it was determined that the degree of oxidation of the pollutant studied was 88.24%.

These results are comparable with those reported by other works using techniques such as photo-Fenton / biological, with values of 94% mineralization (35.5% by the advanced oxidation system and the rest to the biological treatment)⁽²⁶⁾. Finally, it can be concluded that the coupling of different methods is efficient to degrade the polluting organic load of chlorpyrifos since the application of a single method proved to be insufficient to reduce the contamination of pesticides.

4. Conclusions

The biological process proposed was not efficient in reducing the contaminating organic load of the wastewater containing the active ingredient chlorpyrifos, because in this process

its toxic compounds inhibited the microorganisms, which generated adverse effects on the biodegradation. Also, it was affected by the phenomenon of volatilization, which can release toxic compounds harmful to the environment, which could cause adverse effects on ecosystems susceptible to such pollutants.

The heterogeneous photocatalytic process using a CPC showed maximum mineralization of 44.18%. This process is a viable option as a pre-biological treatment for the degradation of several toxic compounds. Finally, by optimizing the concentration of TiO_2 and pH (159.19 ppm and 3.47 respectively), its efficiency could be significantly improved.

By developing the process of treating this type of water using a coupling between the two proposed methods, degradation values of up to 88.24% and mineralization of 67.78% could be obtained. This allows to obtain fewer polluting effluents that can be reused; which can increase the availability of water, and thus reducing the impact of ecosystems by the accumulation of toxic elements.

5. Nomenclature

A_r = Irradiated reactor surface (m^2)

% Bt= Biodegradation of wastewater from the test vessel RT

C_i = Total Organic Carbon Amount of the sample at the beginning of the test.

C_f = Total Organic Carbon Amount of the sample at the end of the test.

I_n = Average global irradiation, taken with a radiometer

RT_o = Mean value of RT vessel concentrations after 3.5 h of incubation.

RB_o = Average value of the concentration in the RB containers after 3.5 h of incubation.

RT_i = Average value of the concentration of the RT containers on day i.

RB_i = Average value of the concentration of the RB containers on day i

R_s = Oxygen consumption rate of the sample with pesticide

R_c = Oxygen consumption rate of the sample with pesticide of the control

Δt_n = Irradiation time = $t_n - t_{n-1}$

V_t = treated volume (Liters)

6. References

- (1) Thind PS, Kumari D, John S. $\text{TiO}_2/\text{H}_2\text{O}_2$ mediated UV photocatalysis of Chlorpyrifos: Optimization of process parameters using response surface methodology. *J Environ Chem Eng.* 2018;6(3):3602–9. Doi: 10.1016/j.jece.2017.05.031.
- (2) Berberidou C, Kitsiou V, Lambropoulou DA, Antoniadis A, Ntonou E, Zalidis GC, et al. Evaluation of an alternative method for wastewater treatment containing pesticides using solar photocatalytic oxidation and constructed wetlands. *J Environ Manage.* 2017;195(Part 2):133–9. Doi: 10.1016/j.jenvman.2016.06.010.
- (3) Clesceri L, Greenberg A, Eaton A, editors. Standard methods for the examination of water and wastewater. 20th ed. Washington, DC: American Public Health Association (APHA); 1999. 293–295 p.
- (4) OECD. Test No. 209: Activated Sludge, Respiration Inhibition Test (Carbon and Ammonium Oxidation). In: OECD Guidelines for the Testing of Chemicals, Section 2. Paris: OECD Publishing; 2010.
- (5) OECD. Test No. 302B: Inherent Biodegradability: Zahn-Wellens/ EVPA

- Test. In: OECD Guidelines for the Testing of Chemicals, Section 3. OECD Publishing; 1992.
- (6) Leal-González FA, Hernandez-Cely MM. Estudio del potencial eólico y solar de Cúcuta, Norte de Santander. *Rev Colomb Tecnol Av.* 2013;2(22):27–33. Doi: 10.24054/16927257.v22.n22.2013.407.
- (7) Becerra-Moreno D. Acople de procesos fotocatalíticos y biológicos para el tratamiento de aguas residuales con residuos de plaguicidas. Universidad del Valle; 2010.
- (8) Vásquez E, Peñuela G, Agudelo S. Estudio de la fotodegradación del clorotalonilo usando las técnicas de fenton y fotocatalisis con dióxido de titanio mediante radiación solar. *Rev Fac Ing Univ Antioquia.* 2010;(51):105–13.
- (9) Gálvez JB, Malato-Rodríguez S, Estrada-Gasca CA, Bandala ER, Gelover S, Leal T. Purificación de aguas por fotocatalisis heterogénea: Estado del Arte. In: Blesa MA, editor. *CYTED Eliminación de Contaminantes por Fotocatalisis Heterogénea.* La Plata, Argentina; 2001. p. 51–76.
- (10) García J. Depuración de aguas contaminadas con plaguicidas empleados en cultivos de caña de azúcar en Colombia. Título del Trabajo Fin de Máster, Universidad Politecnica de Valencia; 2013
- (11) Ministerio de Ambiente y Desarrollo Sostenible (MADS). Resolución MADS 0631 de 2015. Bogotá, DC; 2015.
- (12) Agudelo RM, Jaramillo ML, Peñuela G, Aguirre NJ. Remoción del carbono orgánico disuelto en humedales piloto de resultados subsuperficial y superficial. *Rev Fac Nac Salud Pública.* 2010;28(1):21–8.
- (13) Díaz MCO, Realpe IB, Casas AF. Flujo de Carbono Orgánico Total (COT) en una cuenca andina: caso subcuenca Río Las Piedras. *Rev Ing Univ MEDELLÍN.* 2014;13(24):29–42. Doi: 10.22395/rium.v13n24a2.
- (14) Metcalf and Eddy. *Ingeniería de aguas residuales: tratamiento, vertido y reutilización.* 3a ed. Madrid: McGraw Hill; 1998. 1485 p.
- (15) Manual de agua potable, alcantarillado y saneamiento: Operación y mantenimiento de plantas de tratamiento de aguas residuales municipales: lodos activados [Internet]. Mexico, DF: Secretaria de Medio Ambiente y Recursos Naturales (SEMARNAT); 2016. 256 p. Available from: <http://aneas.com.mx/wp-content/uploads/2016/04/SGAPDS-1-15-Libro51.pdf>.
- (16) Ferrara G, Ramirez A. Análisis de la sedimentabilidad de los lodos biológicos producidos en un RCS durante la desnitrificación de un efluente de un biorreactor de crecimiento adherido. *Rev la Fac Ing UCV.* 2013;28(1):37–43.
- (17) Rojas JAR. *Tratamiento de aguas residuales: Teoría y principios de diseño.* Primera Edición. Bogotá D.C.: Nuevas Ediciones S.A.; 2000.
- (18) Barba-Ho LE, Becerra D. Biodegradabilidad y toxicidad de herbicidas utilizados en el cultivo de caña de azúcar. *Rev EIDENAR [Internet].* 2011;(10):11–20.
- (19) López-Rodríguez J. Intensificación de sistemas de tratamiento para la

- eliminación de compuestos prioritarios y emergentes presentes en aguas residuales [Internet]. Universidad Autónoma de Madrid; 2014.
- (20) Marcelino RBP, Andrade LN, Starling MCVM, Amorim CC, Barbosa MLT, Lopes RP, et al. Evaluación de la biodegradabilidad aeróbica y anaeróbica y de la toxicidad de las aguas residuales farmacéuticas reales de la producción industrial de antibióticos. *Brazilian J Chem Eng.* 2016;33(3):445–52. Doi: 10.1590/0104-6632.20160333s20150136.
- (21) Greenpeace. Greenpeace revela que el 67% del polen recolectado por las abejas en Europa está contaminado con un cóctel de plaguicidas tóxicos. [Published 2014/04/16; Consulted 2018/06/10]; Available from: <http://archivo-es.greenpeace.org/espana/es/news/2014/Abril/Greenpeace-revela-que-el-67-del-polen-recolectado-por-las-abejas-en-Europa-esta-contaminado/>.
- (22) StatPoint Technologies Inc. Statgraphics® centurion XVI manual de usuario. New Jersey; 2010. [Consulted 2018/06/10]. Available from: [https://www.statgraphics.net/wp-](https://www.statgraphics.net/wp-content/uploads/2015/03/Centurion-XVI-Manual-Principal.pdf)
- [content/uploads/2015/03/Centurion-XVI-Manual-Principal.pdf](https://www.statgraphics.net/wp-content/uploads/2015/03/Centurion-XVI-Manual-Principal.pdf).
- (23) Duarte-Beltrán C, Forero-Ausique V. Evaluación de un sistema de oxidación por fotocátalisis para la degradación del plaguicida thiodan 35 ec (i.a. Endosulfán) a nivel de laboratorio [Dissertation]. Bogotá: Universidad de la Salle; 2008. 237 p.
- (24) Moeller G, Tomasini AC. Microbiología de lodos activados. In: Memorias curso internacional de sistemas integrados de tratamiento de aguas residuales y su reúso para un medio ambiente sustentable [Internet]. Bogotá: Instituto Mexicano de Tecnología del Agua (IMTA); 2004.
- (25) Pavas EG, Tirado KM, Grupo de Investigación en Procesos Ambientales y Biotecnológicos (GIPAB). Aplicación de los sistemas fotocatalíticos para la destrucción de compuestos orgánicos y otras sustancias en fuentes hídricas. *Cuad Investig - Univ EAFIT* [Internet]. 2006;(49).
- (26) García-Gómez C, Gortáres-Moroyoqui P, Drogui P. Contaminantes emergentes: efectos y tratamientos de remoción. *Rev Química Viva.* 2011;10(2):96–105.

